



Toolbar to Toolbar Connector Assembly AA-9072

Go to www.tilmor.com/resources for complete parts list, additional resources and replacement part ordering.

Release Date: 09/08/2020
Document Number: 12-70050
Revision Number: 00



ATTENTION

Review safety information
before operation.





Tools

3/4" Socket
3/4" Wrench
Ratchet
Torque Wrench


Installation Time (estimated)

30 minutes


REQUIRED PARTS

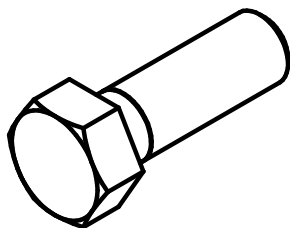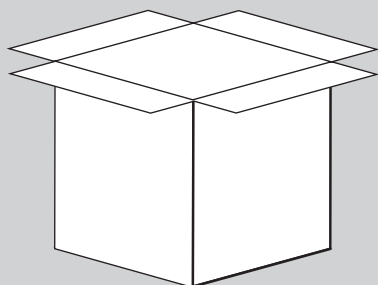


6x
Bolt,
1/2-13 USS X 1-1/2
90-0812

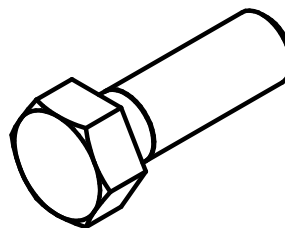


6x
Bolt,
1/2-13 USS X 2
90-0816

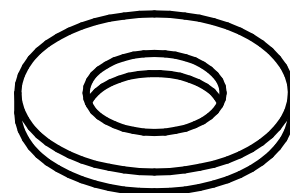

12x
Washer,
Flat 1/2 SAE
95-08

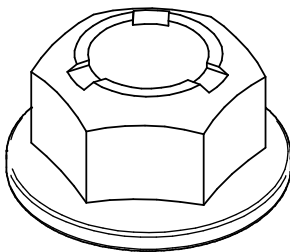

12x
Nut,
SRF 1/2-13 USS
99-SF08

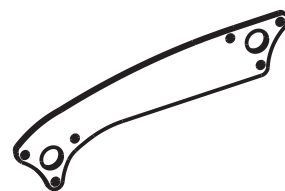


2x
Plate, Toolbar Mount
AA-1202


ASSEMBLY

 3/4" socket, 3/4" wrench, Ratchet

1. Remove the top link assembly from the toolbar.

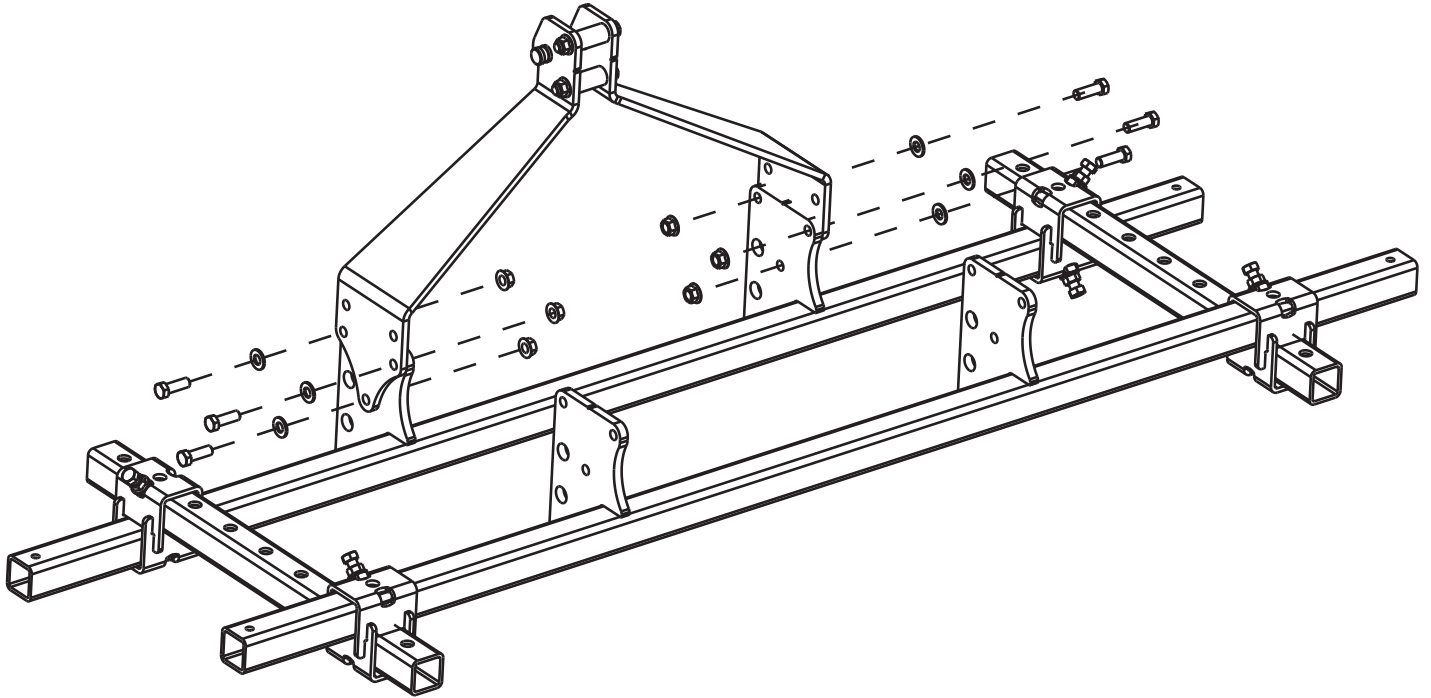


2. Position the toolbar mount plates on the toolbars aligning the mounting holes.

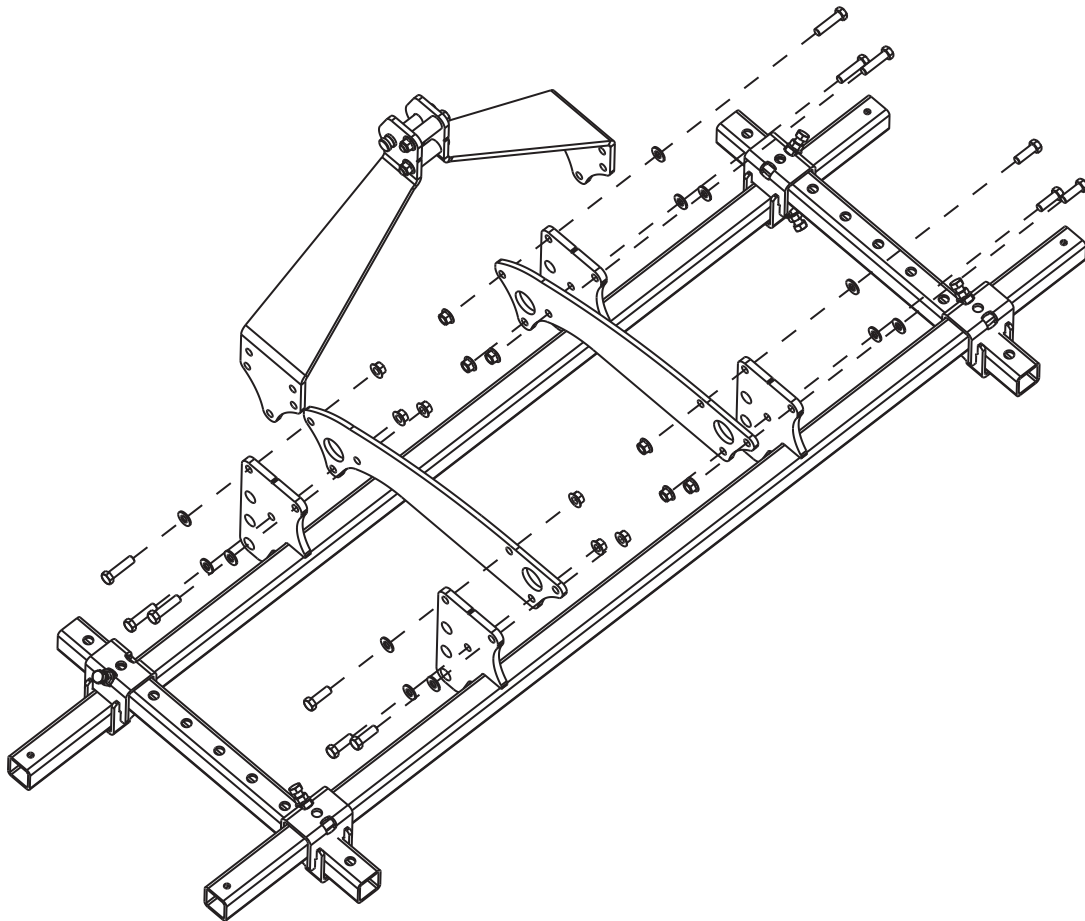


ASSEMBLY


 3/4" socket, 3/4" wrench, Ratchet , Torque Wrench




6x
Bolt,
1/2-13 USS X 1-1/2
90-0812




6x
Bolt,
1/2-13 USS X 2
90-0816



6x
Washer,
Flat 1/2 SAE
95-08



6x
Nut,
SRF 1/2-13 USS
99-SF08



2x
Plate, Toolbar
Mount
AA-1202

3. Secure the top link and toolbar mount plates in place using the 1/2" hardware provided in the kit.
4. Torque the 1/2" hardware to 75ft-lbs (102Nm).

