STILMOR

Plastic Winder

Go to <u>www.tilmor.com/resources</u> for complete parts list, additional resources and replacement part ordering.

Release Date: 09/25/2018 Document Number: 12.50002 Revision Number: 00

X

Tools

ATTENTION


Review safety information before operation.

9/16" wrench 5/8" wrench 3/4" wrench 9/16" socket 5/8" socket 3/4" socket Torque Wrench Extension

Assembly Time (estimated)

1 hour

REQUIRED PARTS

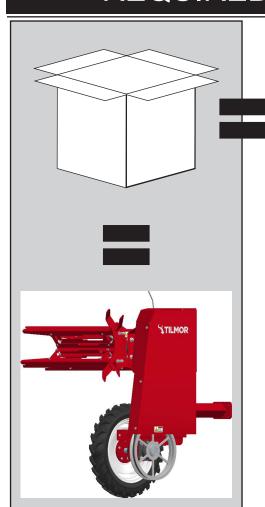



5x 99.E0044 7/16" Lug Nut



99.E0103 1/2" Locking Flange Nut



1x 99.E0082 3/8" Locking Flange Nut



4x 95.08 1/2" Flat Washer



1x 95.06 3/8" Flat washer



1x 90.0620 3/8" x 2-1/4" Hex



4x 90.0812 1/2" x 1-1/2" Hex Bolt



1x AB-6005 Tool Bar Mounting Bracket




53.0182-R Wheel and Tire



PLASTIC WINDER ASSEMBLY



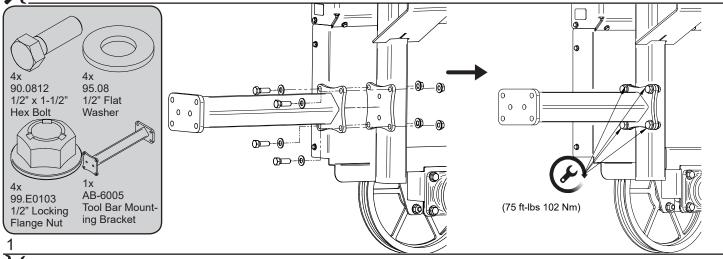


5/8" socket, Torque wrench, Extension



NOTE: Position the wheel with the arrow on the bottom of the tire pointing forward.

The reverse positioning of the tire allows the tire to shed dirt, and drives the plastic winder more efficiently.

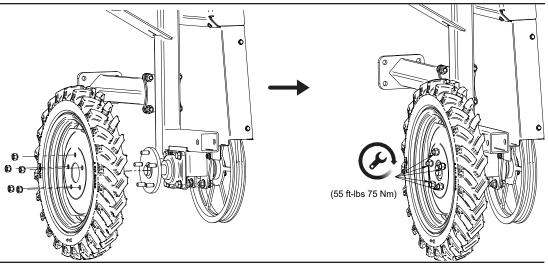

9/16" socket, 9/16" wrench, Torque wrench, Extension

